



Powers®

BLUE-TIP 2 SCREW-BOLT™ HANGERMATE™

HEAVY DUTY CONCRETE SCREW BOLTS



The preferred brand for serious construction.

Powers has been a pioneer in the fastening industry since 1921 and today is a recognised global leader in concrete and masonry fastening systems for the construction industry.

Powers is the worldwide leader in code-approved fastening solutions with product availability in more than 50 countries.

With over 90 years of experience, Powers can provide a world's-best solution and technical advice for your anchoring requirements.



POWERS a founding board member of AEFAC (Australian Engineered Fasteners and Anchor Council).

AEFAC is a consortium made of leading industry partners / suppliers of quality anchors and Swinburne University of Technology.

AEFAC is a new industry-focused initiative which aims to set the standard for the specification, selection, design, applications and installation of structural anchors and fasteners in the Australian construction industry.

AEFAC aims to enhance safety and efficiency associated with the use of structural anchors and fasteners. The guidelines and resources being developed by AEFAC are intended to become the codes of practice in Australia.

Approvals & Reports

To ensure maximum performance, Powers undergo the most rigorous manufacturing and testing procedures.

As a result, many have received some of the world's most demanding approvals including ETA and ICC-ES certification. For full technical information and to download the relevant approval and certification documentation please visit

www.powers.com.au



High Performance Anchoring Systems

The Powers Code Compliant range includes our highest performing mechanical and chemical anchoring systems that carry ETA assessment and can be used with confidence to meet National Construction Code (NCC) requirements for safety critical applications.

ETA assessment reports can be used to design anchors in accordance with AS5216:2018 which is referenced in the National Construction Code (NCC) 2019.



Anchor products holding a European Technical Approval/Assessment (ETA) are qualified according to one of the following:

- European Assessment Document **EAD 330232** "Mechanical fasteners for use in concrete"
 - European Assessment Document **EAD 330499** "Bonded fasteners for use in concrete"
 - European Assessment Document **EAD 330747** "Fasteners for use in concrete for redundant non-structural systems"
 - European Assessment Document **EAD 330076** "Metal injection anchors for use in masonry"
 - European Assessment Document **EAD 330087** "Systems for post-installed rebar connections with mortar"
- Product complying with European standards or assessments are marked with CE marking



The Evaluation Service of the International Code Council (ICC-ES) provides test guidelines for anchor qualification in the US. The technical reports issued on the basis of these guidelines are internationally recognized and provide a high degree of safety.



Loads evolving from earthquakes are termed seismic loads and are characterized by cyclic loading. The suitability of the seismic load is classified as:

Seismic Category C1

Seismic Category C2



A fire resistance rating provides the duration of fire exposure for which the anchor product is qualified based on ETA or other relevant evaluation reports. Ratings within the context of the ETA are based on the following Technical Report:

EOTA TR 020 Evaluation of anchorages in concrete concerning resistance to fire.



NSF International is an independent organization that provides standards for product certification for public health and the environment.



The Leadership in Energy and Environmental Design (LEED) Green Building Rating system™ is the preeminent program for the design, construction, maintenance and operations of high-performance green buildings.

The use of products listed contribute toward satisfying Credit 4.1-Low Emitting Materials under LEED®.



Products tested for the emission of volatile substances in indoor air, with a risk of inhalation toxicity, on a scale ranging from class A+ (very low emissions) to C (high emissions) level.

BLUE-TIP 2 SCREW-BOLT™ AND HANGERMATE™

HEAVY DUTY CONCRETE SCREW BOLTS

The BLUE-TIP 2 SCREW-BOLT™ and HANGERMATE™ is a state-of-the-art product line of heavy duty screw anchors which is available with a wide variety of head types. The one piece design makes it is easy to install and the preferred choice for fast but reliable anchoring which is also fully removable. This anchor is designed to resist structural and nonstructural loading in cracked and uncracked concrete. The patented thread design has been designed for use with standard drill bits, reduces installation torque and enhances productivity.



Applications

Attaching steel / timber to concrete, ventilation systems, racking and shelving, temporary supports, fencing, railings, stadium seating, base plates, substructures, windows and door frames, scaffolding, facade.



HEX HEAD - ZINC AND GALVANISED

Size (mm)	Length (mm)	Nominal Embedment Depth (mm)	Maximum Fixture Thickness (mm)	Drilled Hole Ø (mm)	Fixture Hole Ø (mm)	Socket Size (mm)	Box Qty	Carton Qty	ZINC CLEAR	GALVANISED
									Part No.	Part No.
6	35*	30	5	6	9	10	100	800	PBT635-PWR	PBTG635-PWR
6	50	40	10	6	9	10	100	800	PBT650-PWR	PBTG650-PWR
6	80	40 / 55	40 / 25	6	9	10	50	400	PBT680-PWR	PBTG680-PWR
6	100	40 / 55	60 / 45	6	9	10	50	400	PBT6100-PWR	PBTG6100-PWR
8	55	50	5	8	12	13	50	400	PBT855-PWR	PBTG855-PWR
8	65	50	15	8	12	13	50	400	PBT865-PWR	PBTG865-PWR
8	75	50	25	8	12	13	50	200	PBT875-PWR	PBTG875-PWR
8	100	50 / 75	50 / 25	8	12	13	25	100	PBT8100-PWR	PBTG8100-PWR
8	140	50 / 75	90 / 65	8	12	13	25	100		PBTG8140-PWR
10	60*	55	5	10	14	17	50	200	PBT1060-PWR	PBTG1060-PWR
10	80	60	20	10	14	17	25	200	PBT1080-PWR	PBTG1080-PWR
10	100	60 / 85	40 / 15	10	14	17	25	100	PBT10100-PWR	PBTG10100-PWR
10	120	60 / 85	60 / 35	10	14	17	25	100	PBT10120-PWR	PBTG10120-PWR
10	140	60 / 85	80 / 55	10	14	17	25	100		PBTG10140-PWR
12	80	75	5	12	16	19	25	100	PBT1280-PWR	PBTG1280-PWR
12	100	75	25	12	16	19	25	100	PBT12100-PWR	PBTG12100-PWR
12	150	75 / 100	75 / 50	12	16	19	20	80	PBT12150-PWR	PBTG12150-PWR
16	100	95	5	16	20	24	10	40	PBT16100-PWR	
16	150	95 / 130	55 / 20	16	20	24	10	40	PBT16150-PWR	
16	200	95 / 130	105 / 70	16	20	24	10	40		PBTG16200-PWR

NOTES: * Sizes not covered by ETA. 6mm size is covered by both ETA-16/0867 (Option 1) and ETA-15/0810 (Redundant non-structural applications)



Approvals & Reports

High Performance Anchoring Systems

The Powers Code Compliant range includes our highest performing mechanical and chemical anchoring systems that carry ETA assessment and can be used with confidence to meet National Construction Code (NCC) requirements for safety critical applications.

The below ETA assessment reports can be used to design anchors in accordance with AS5216:2018 which is referenced in the National Construction Code (NCC) 2019.



ETA-16/0867

Cracked & uncracked concrete



ETA-15/0810

Redundant non-structural applications



Fire Rated

F120 (refer to ETA-16/0867 and ETA-15/0810 for load capacities under fire)



Seismic C1

C1 on sizes with ETA approval

BLUE-TIP 2 SCREW-BOLT™



COUNTERSUNK HEAD - GALVANISED

GALVANISED									Part No.
Size (mm)	Length (mm)	Nominal Embedment Depth (mm)	Maximum Fixture Thickness (mm)	Drilled Hole Ø (mm)	Fixture Hole Ø (mm)	Drive Type	Box Qty	Carton Qty	
6	60	40	20	6	9	T40	50	400	PBTCSKG660-PWR
6	80	40 / 55	40 / 25	6	9	T40	50	400	PBTCSKG680-PWR
8	65	50	15	8	12	T45	50	400	PBTCSKG865-PWR
8	75	50	25	8	12	T45	50	200	PBTCSKG875-PWR
8	100	50 / 75	50 / 25	8	12	T45	50	200	PBTCSKG8100-PWR
10	60*	50	10	10	14	T50	25	200	PBTCSKG1060-PWR
10	75	60	15	10	14	T50	25	200	PBTCSKG1075-PWR
10	100	60 / 85	40 / 15	10	14	T50	25	100	PBTCSKG10100-PWR
12	75*	65	10	12	16	T55	25	100	PBTCSKG1275-PWR
12	100	75	25	12	16	T55	25	100	PBTCSKG12100-PWR
12	150	75 / 100	75 / 50	12	16	T55	25	100	PBTCSKG12150-PWR



EYEBOLT - ZINC

ZINC CLEAR							Part No.
Size (mm)	Length (mm)	Nominal Embedment Depth (mm)	Eyelet Ø (mm)	Drilled Hole Ø (mm)	Box Qty	Carton Qty	
6	50*	50	12.7	6	100	800	PBTEYE650-PWR
8	55*	55	15.2	8	50	400	PBTEYE855-PWR
10	65*	65	17.1	10	50	200	PBTEYE1065-PWR
12	75*	75	21.6	12	50	200	PBTEYE1275-PWR



TIE DOWN INTERNAL THREADED HEAD - GALVANISED
(REPORT PENDING)

GALVANISED									Part No.
Size (mm)	Length (mm)	Nominal Embedment Depth (mm)	Maximum Fixture Thickness (mm)	Drilled Hole Ø (mm)	Fixture Hole Ø (mm)	Socket Size (mm)	Box Qty	Carton Qty	
12	100*	62	38	12	14	19	25	100	PBTTDG12100-PWR
12	150*	102	48	12	14	19	25	100	PBTTDG12150-PWR



PAN HEAD - ZINC

ZINC CLEAR									Part No.
Size (mm)	Length (mm)	Nominal Embedment Depth (mm)	Maximum Fixture Thickness (mm)	Drilled Hole Ø (mm)	Fixture Hole Ø (mm)	Drive Type	Box Qty	Carton Qty	
6	40	35**	5	6	9	T40	50	400	PBTP640-PWR
6	60	40 / 55	20 / 5	6	9	T40	50	400	PBTP660-PWR
6	100	40 / 55	60 / 45	6	9	T40	50	400	PBTP6100-PWR

NOTES: * Sizes not covered by ETA

** Size covered in ETA-15/0810 (Redundant non-structural applications)

BLUE-TIP 2 SCREW-BOLT™ AND HANGERMATE™



DOMEST HEAD - GALVANISED

GALVANISED									Part No.
Size (mm)	Length (mm)	Nominal Embedment Depth (mm)	Maximum Fixture Thickness (mm)	Drilled Hole Ø (mm)	Fixture Hole Ø (mm)	Drive Type	Box Qty	Carton Qty	
6	50	40	10	6	9	T30	100	800	PBTDG650-PWR
6	60	40 / 55	20 / 5	6	9	T30	50	400	PBTDG660-PWR
6	80	40 / 55	40 / 25	6	6	T30	50	400	PBTDG680-PWR



HANGERMATE™ INTERNAL THREADED HEAD - ZINC

ZINC CLEAR									Part No.
Size (mm)	Length (mm)	Drilled Hole Depth Ø (mm)	Nominal Embedment Depth (mm)	Internal Thread Size (mm)	Drilled Hole Ø (mm)	Socket Size (mm)	Box Qty	Carton Qty	
6	35	45	35	M6	6	10mm	100	800	HM6M635-PWR
6	40	50	40	M10	6	13mm	100	800	HM6M1040-PWR
6	40	50	40	M10	6	13mm	-	500	HM6M1040KIT-PWR
8	50	60	50	M12	8	15mm	100	400	HM8M1250-PWR
8	50	60	50	M12	8	15mm	-	300	HM8M1250KIT-PWR



HANGERMATE™ SETTING TOOLS

Description	Box Qty	Carton Qty	Part No.
Socket for M6 HANGERMATE™	1	16	HMSTM6-PWR
Socket for M10 HANGERMATE™	1	16	HMSTM810-PWR
Socket for M12 HANGERMATE™	1	16	HMSTM12-PWR




HANGERMATE™ EXTERNAL THREADED - ZINC (PENDING ETA)

ZINC CLEAR									Part No.
Size (mm)	Length (mm)	Drilled Hole Depth Ø (mm)	Embedment Depth (mm)	Metric External Thread Size (mm)	Drilled Hole Ø (mm)	Socket Size (mm)	Box Qty	Carton Qty	
6	35	45	35	M10	6	13mm	50	400	HMEM10635-PWR
6	55	65	55	M10	6	13mm	50	400	HMEM10655-PWR


BLUE-TIP 2 SCREW-BOLT™

INSTALLATION INSTRUCTIONS INTO CONCRETE

Standard Drill Bit

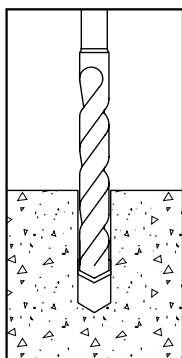


1.) Using the proper drill bit size, drill a hole into the base material to the required depth.

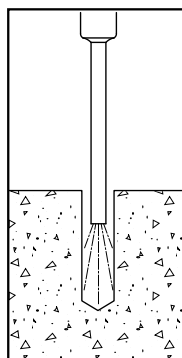


2.) Remove dust and debris from the hole using a hand pump or compressed air.


Hollow Drill Bit

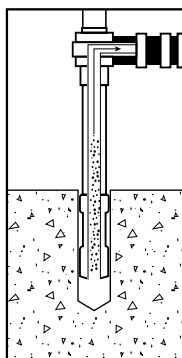

1. & 2.) Connect the hollow drill bit of proper size to a vacuum, and drill a hole into the base material to the required depth while the vac is running. The dust is removed during the drilling process.

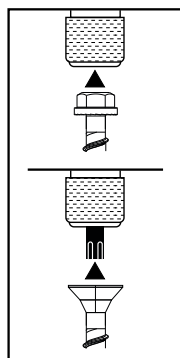

3.) Select impact wrench and mount the screw anchor head onto the appropriate socket or bit.

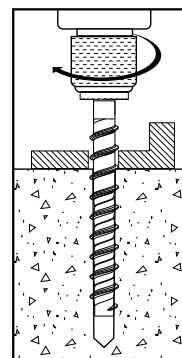


4.) Drive the anchor through the fixture into the hole at least to the minimum required embedment depth and until the head of the anchor comes into contact with the fixture.


EYEBOLT

INSTALLATION INSTRUCTIONS INTO CONCRETE


Standard Drill Bit

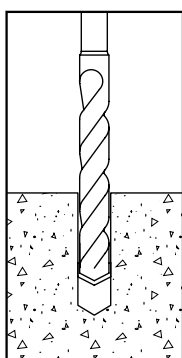


1.) Using the proper drill bit size, drill a hole into the base material to the required depth.

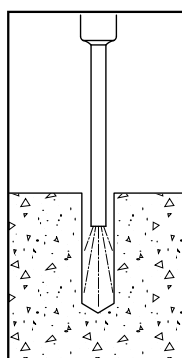


2.) Remove dust and debris from the hole using a hand pump or compressed air.

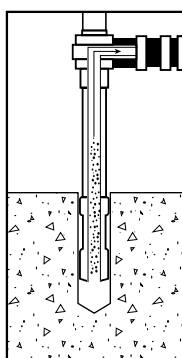



1. & 2.) Connect the hollow drill bit of proper size to a vacuum, and drill a hole into the base material to the required depth while the vac is running. The dust is removed during the drilling process.

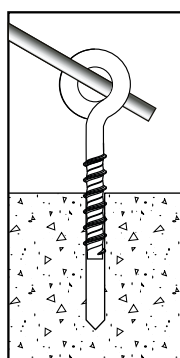

3.) Insert proper size steel rod through the eye head. Insert the anchor directly into the drilled hole. Begin tightening the anchor by applying forward pressure when engaging the first thread. Continue tightening the anchor until the eye is firmly seated against the concrete surface.

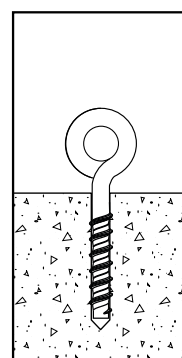

4.) The installation is complete once the head is firmly seated against the concrete surface.

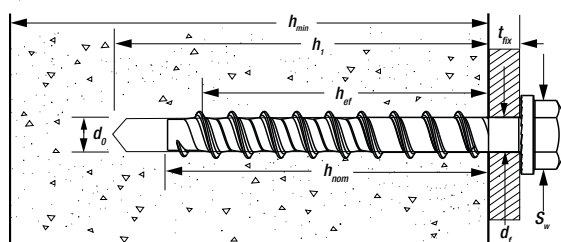


TENSION




SHEAR

HANGER MATE™


INSTALLATION INSTRUCTIONS INTO CONCRETE

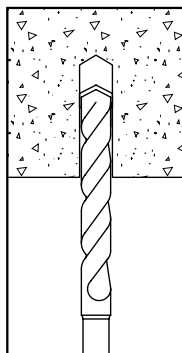


1.) Using the proper drill bit size, drill a hole into the base material to the required depth.

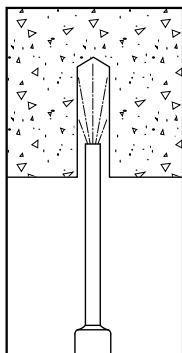


2.) Remove dust and debris from the hole using a hand pump or compressed air.

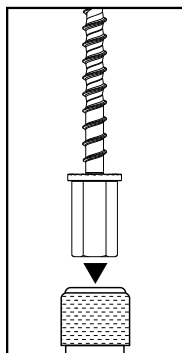

3.) Select impact wrench and mount the screw anchor head into the hex socket.

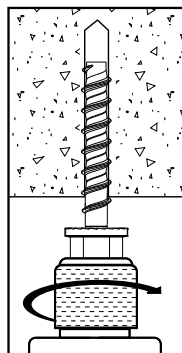





4.) Drive the anchor into the hole at least to the minimum required embedment depth and until the head of the anchor comes into contact with the base material.

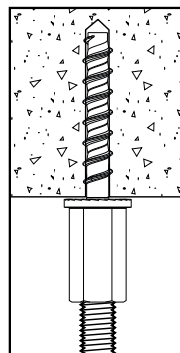

5.) Screw the threaded rod into the anchor head.

HANGER MATE™

INSTALLATION INSTRUCTIONS INTO HOLLOW CORE CONCRETE

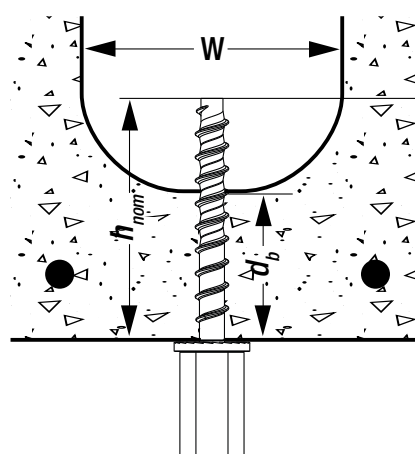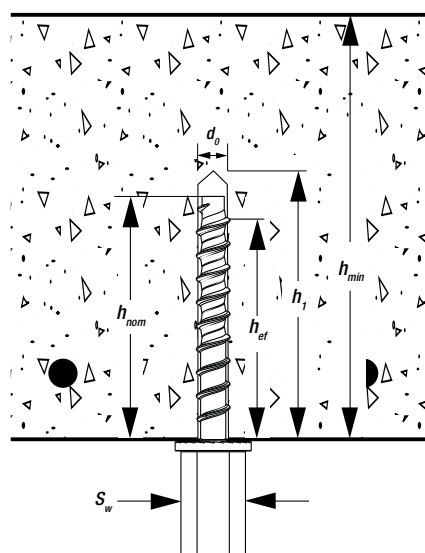

Note: Concrete breaks / spalls on the far end of drilling and the amount of spalling varies. d_b is the minimum thickness required after the hole has been drilled.

BLUE-TIP 2 SCREW-BOLT™

ALLOWABLE LOADS STATIC / QUASI-STATIC LOAD CAPACITIES

(In accordance to EAD 330232-00-0601, previously ETAG 001 - Option 1)

Size (mm)	Nominal Embedment Depth h_{ef} (mm)	Drill Hole Depth h_1 (mm)	Drill Hole Dia. h_0 (mm)	Clearance Hole Dia. d_i (mm)	Concrete Thickness (mm)	20MPa		32MPa		40MPa		50MPa	
						Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)



ALLOWABLE LOADS: Static / Quasi-Static Load Capacities in Uncracked Concrete

6	40	50	6	9	80	2.6	2.3	3.2	2.3	3.6	2.3	4.0	2.3
	55	65			100	4.8	3.5	6.0	3.5	6.7	3.5	7.5	3.5
8	50	60	8	12	100	4.8	4.6	6.0	4.6	6.7	4.6	7.5	4.6
	75	85			120	7.9	7.0	10.0	7.0	11.2	7.0	12.5	7.0
10	60	70	10	14	105	7.1	7.1	9.0	7.1	10.0	7.1	11.2	7.1
	85	95			140	10.5	10.6	13.3	10.6	14.9	10.6	16.7	10.6
12	75	85	12	16	125	8.3	10.0	10.5	12.7	11.8	14.1	13.2	15.8
	100	110			160	16.1	18.9	20.4	18.9	22.8	18.9	25.5	18.9
16	95	115	16	20	160	11.7	28.0	14.7	35.4	16.5	37.1	18.4	37.1
	130	150			195	16.9	37.1	21.4	37.1	23.9	37.1	26.7	37.1

Size (mm)	Nominal Embedment Depth h_{ef} (mm)	Drill Hole Depth h_1 (mm)	Drill Hole Dia. h_0 (mm)	Clearance Hole Dia. d_i (mm)	Concrete Thickness (mm)	20MPa		32MPa		40MPa		50MPa	
						Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)



ALLOWABLE LOADS: Static / Quasi-Static Load Capacities in Cracked Concrete

6	40	50	6	9	80	1.2	2.3	1.5	2.3	1.7	2.3	1.9	2.3
	55	65			100	1.8	3.5	2.3	3.5	2.5	3.5	2.8	3.5
8	50	60	8	12	100	1.0	3.8	1.2	4.6	1.3	4.6	1.5	4.6
	75	85			120	3.6	7.0	4.5	7.0	5.1	7.0	5.6	7.0
10	60	70	10	14	105	2.4	5.0	3.0	6.3	3.4	7.0	3.8	7.1
	85	95			140	4.4	10.6	5.5	10.6	6.2	10.6	6.9	10.6
12	75	85	12	16	125	5.6	7.0	7.0	8.9	7.9	9.9	8.8	11.1
	100	110			160	7.1	18.9	9.0	18.9	10.1	18.9	11.3	18.9
16	95	115	16	20	160	4.0	19.6	5.0	24.8	5.6	27.7	6.3	31.0
	130	150			195	9.5	33.1	12.0	37.1	13.5	37.1	15.1	37.1

NOTES:

- Allowable loads incorporate capacity reduction factors as per AS5216:2018 and ETA-16/0867 and are inclusive of partial safety factor $\gamma=1.4$ for load actions. Refer to relevant national codes regarding load types and associated factors for further guidance.
- The given capacities are for single anchor not influenced by spacing from other anchors and distance from edge/s of concrete.

BLUE-TIP 2 SCREW-BOLT™

ULTIMATE LIMIT STATE DESIGN STATIC / QUASI-STATIC LOAD CAPACITIES

(In accordance to EAD 330232-00-0601, previously ETAG 001 - Option 1)

Size (mm)	Nominal Embedment Depth h_{ef} (mm)	Drill Hole Depth h_1 (mm)	Drill Hole Dia. h_0 (mm)	Clearance Hole Dia. d_i (mm)	Concrete Thickness (mm)	20MPa		32MPa		40MPa		50MPa	
						Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)



ULTIMATE LIMIT STATE DESIGN: Static / Quasi-Static Load Capacities in Uncracked Concrete

6	40	50	6	9	80	3.6	3.2	4.5	3.2	5.1	3.2	5.6	3.2
	55	65			100	6.7	5.0	8.4	5.0	9.4	5.0	10.5	5.0
8	50	60	8	12	100	6.7	6.5	8.4	6.5	9.4	6.5	10.5	6.5
	75	85			120	11.1	9.8	14.1	9.8	15.7	9.8	17.6	9.8
10	60	70	10	14	105	9.9	9.9	12.6	9.9	14.0	9.9	15.7	9.9
	85	95			140	14.8	14.9	18.7	14.9	20.9	14.9	23.3	14.9
12	75	85	12	16	125	11.7	14.0	14.8	17.7	16.5	19.8	18.4	22.1
	100	110			160	22.6	26.5	28.6	26.5	32.0	26.5	35.7	26.5
16	95	115	16	20	160	16.3	39.2	20.6	49.5	23.1	51.9	25.8	51.9
	130	150			195	23.7	51.9	29.9	51.9	33.5	51.9	37.4	51.9

Size (mm)	Nominal Embedment Depth h_{ef} (mm)	Drill Hole Depth h_1 (mm)	Drill Hole Dia. h_0 (mm)	Clearance Hole Dia. d_i (mm)	Concrete Thickness (mm)	20MPa		32MPa		40MPa		50MPa	
						Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)



ULTIMATE LIMIT STATE DESIGN: Static / Quasi-Static Load Capacities in Cracked Concrete

6	40	50	6	9	80	1.7	3.2	2.1	3.2	2.4	3.2	2.6	3.2
	55	65			100	2.5	5.0	3.2	5.0	3.5	5.0	4.0	5.0
8	50	60	8	12	100	1.3	5.4	1.7	6.5	1.9	6.5	2.1	6.5
	75	85			120	5.0	9.8	6.3	9.8	7.1	9.8	7.9	9.8
10	60	70	10	14	105	3.3	7.0	4.2	8.8	4.7	9.8	5.3	9.9
	85	95			140	6.1	14.9	7.7	14.9	8.6	14.9	9.7	14.9
12	75	85	12	16	125	7.8	9.8	9.8	12.4	11.0	13.9	12.3	15.5
	100	110			160	10.0	26.5	12.6	26.5	14.1	26.5	15.8	26.5
16	95	115	16	20	160	5.6	27.4	7.0	34.7	7.9	38.8	8.8	43.3
	130	150			195	13.3	46.4	16.9	51.9	18.9	51.9	21.1	51.9

NOTES:

- Ultimate limit state design capacities incorporate capacity reduction factors as per AS5216:2018 and ETA-16/0867.
- The given capacities are for single anchor not influenced by spacing from other anchors and distance from edge/s of concrete.

BLUE-TIP 2 SCREW-BOLT™ AND HANGER-MATE™

ALLOWABLE LOADS AND ULTIMATE LIMIT DESIGN STATIC / QUASI-STATIC LOAD CAPACITIES FOR REDUNDANT NON-STRUCTURAL APPLICATIONS

(In accordance to EAD 330747-00-0601, previously ETAG 001- Part 6)



UNCRAKED CONCRETE

Size (mm)	Nominal Embedment Depth h_{ef} (mm)	Drill Hole Depth h_1 (mm)	Drill Hole Dia. h_0 (mm)	Clearance Hole Dia. d_f (mm)	Concrete Thickness (mm)	20MPa		32MPa		40MPa		50MPa	
						Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)

ALLOWABLE LOADS: Static / Quasi-Static Load Capacities in Uncracked Concrete

BLUE-TIP 2 SCREWBOLT™ 6	35	45	6	9	80	1.2							
HANGER-MATE™ 6	35	45	6	-	80	1.2							

ULTIMATE LIMIT STATE DESIGN: Static / Quasi-Static Load Capacities in Uncracked Concrete

BLUE-TIP 2 SCREWBOLT™ 6	35	45	6	9	80	1.7							
HANGER-MATE™ 6	35	45	6	-	80	1.7							



CRACKED CONCRETE

Size (mm)	Nominal Embedment Depth h_{ef} (mm)	Drill Hole Depth h_1 (mm)	Drill Hole Dia. h_0 (mm)	Clearance Hole Dia. d_f (mm)	Concrete Thickness (mm)	20MPa		32MPa		40MPa		50MPa	
						Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)

ALLOWABLE LOADS: Static / Quasi-Static Load Capacities in Cracked Concrete

BLUE-TIP 2 SCREWBOLT™ 6	35	45	6	9	80	1.2							
HANGER-MATE™ 6	35	45	6	-	80	1.2							

ULTIMATE LIMIT STATE DESIGN: Static / Quasi-Static Load Capacities in Cracked Concrete

BLUE-TIP 2 SCREWBOLT™ 6	35	45	6	9	80	1.7							
HANGER-MATE™ 6	35	45	6	-	80	1.7							



HOLLOW CORE CONCRETE

(available bottom flange thickness $d_b \geq 35$ mm)

Size (mm)	Nominal Embedment Depth h_{ef} (mm)	Drill Hole Depth h_1 (mm)	Drill Hole Dia. h_0 (mm)	Clearance Hole Dia. d_f (mm)	Concrete Thickness (mm)	20MPa		32MPa		40MPa		50MPa	
						Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)	Tension (kN)	Shear (kN)

ALLOWABLE LOADS: Static / Quasi-Static Load Capacities in Hollow Core Concrete

BLUE-TIP 2 SCREWBOLT™ 6	35	35	6	9	35	0.9							
HANGER-MATE™ 6	35	35	6	-	35	0.9							

ULTIMATE LIMIT STATE DESIGN: Static / Quasi-Static Load Capacities in Hollow Core Concrete

BLUE-TIP 2 SCREWBOLT™ 6	35	35	6	9	35	1.2							
HANGER-MATE™ 6	35	35	6	-	35	1.2							

NOTES:


- Ultimate limit state design capacities incorporate capacity reduction factors as per AS5216:2018 and ETA-15/0810.
- Allowable loads incorporate capacity reduction factors as per AS5216:2018 and ETA-15/0810 and are inclusive of partial safety factor $\gamma=1.4$ for load actions. Refer to relevant national codes regarding load types and associated factors for further guidance.
- The given capacities are for single anchor not influenced by spacing from other anchors and distance from edge/s of concrete.



Powers Design Assist

STATE-OF-THE-ART DESIGN SOFTWARE

FOR ANCHORING TO CONCRETE

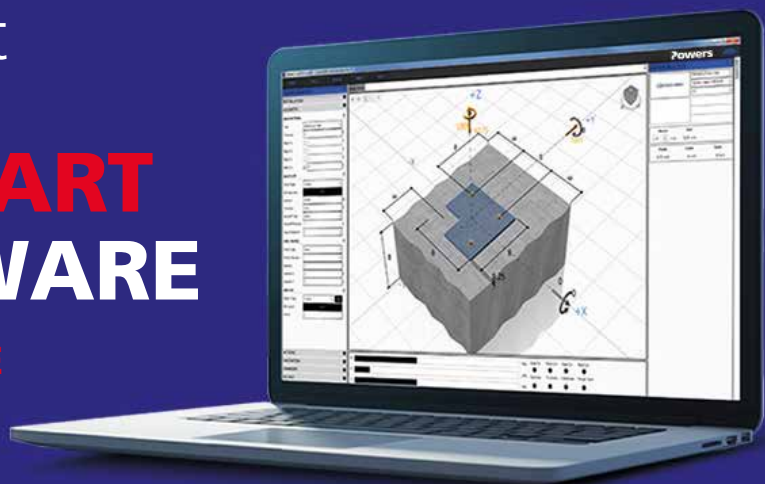

Available to download via powers-guide.com/pda-software

DISCLAIMER FOR RECOMMENDATIONS, INFORMATION AND USE OF DATA:

The recommendations, information and data contained in this manual are put together with the greatest care and accuracy possible. It is based on principles, equations and safety factors set out in the technical documentation of Stanley Black & Decker that are believed to be correct and current as of 01/04/19. The information and data is subject to change after such date as Stanley Black & Decker reserves the right to change the designs, materials and specifications of the products in this publication without notice. It is the responsibility of the design professional to ensure that a suitable product is selected, properly designed and used in the intended application. This includes that the selected product and its use is compliant with the applicable building codes and other legal requirements and will satisfy durability and performance criteria and margins of safety which they determine are applicable. The products must be used, handled, applied and installed strictly in accordance with all current instructions for use published by Stanley Black & Decker. The performance data given in this manual are the result of the evaluation of tests conducted under laboratory conditions. It is the responsibility of the designer and installer in charge to consider the conditions on site and to ensure the performance data given in associated publications is applicable to the actual conditions. In particular the base material and environmental conditions have to be checked prior to installation. In case of doubt, contact the technical support of Stanley Black & Decker.

LIMITATION OF LIABILITY

Stanley Black & Decker offers a limited product warranty to customers or end users that the product meets its applicable specifications. Except for the express warranty in the immediately preceding sentence, Stanley Black & Decker grants no other warranties, express or implied, regarding the products, their fitness for any purpose, their quality, their merchantability or otherwise. Further, Stanley Black & Decker shall have no liability with respect to changes in the design, materials and specifications in the products presented in this publication, nor with respect to any product which has been modified or installed improperly, regardless of any specific instructions to the installer. The responsible designer and installer shall indemnify, defend, and hold harmless Stanley Black & Decker for any and all claimed loss or damage occasioned, in a whole or in part, by the modified products or deviation in product installation procedures.

LIMITATION OF DAMAGES

Stanley Black & Decker or its affiliates or their respective officers, members, managers, directors, representatives, agents or employees are not obligated for direct, indirect, incidental or consequential damages, losses or expenses in connection with, or by reason of, the use of, or inability to use the products for any purpose. Implied warranties of merchantability or fitness for a particular purpose are specifically excluded. Last Modified April 2019.



Australia

VIC (Head Office)

Level 2, 810 Whitehorse Road,
Box Hill, Victoria, 3128

VIC (Warehouse)

29 Indian Drive,
Keysborough, Victoria, 3175

Tel: 1800 338 002

Fax: 1800 080 898

Email: info@powers.com.au

NSW

11 Smeaton Grange Road
Smeaton Grange NSW 2567

T: (02) 4634 7600

F: (02) 4648 3139

E: info@powers.com.au

QLD

58 Link Drive

Yatala QLD 4207

T: (07) 3441 9300

F: (07) 3441 9399

E: info@powers.com.au

SA

5 Stirling Street

Thebarton SA 5031

T: (08) 8161 3000

F: (08) 8443 6565

E: info@powers.com.au

WA

49A Mercantile Way

Malaga WA 6090

T: (08) 9408 9600

F: (08) 9303 4477

E: info@powers.com.au

New Zealand

39 Business Parade North, Highbrook,
East Tamaki Heights, Auckland, 2013.
PO Box 12-135, Penrose, Auckland, 1642

T: 0800 3392 58

F: 0800 2782 6539

E: nzsales@sbdinc.com

www.powers.com.au